

Viglen Omnino 5

How to Remove and Replace the Integrated Stand

This manual will guide you through the process of detaching the integrated stand from the Omnino 5 chassis.

Step 1 - Preparing to remove the back panel from the Omnino 5

Before the integrated stand can be detached the chassis back panel must first be removed. To do this you will need to place the Omnino 5 screen down onto a soft surface and lift the chassis leg to its highest point:

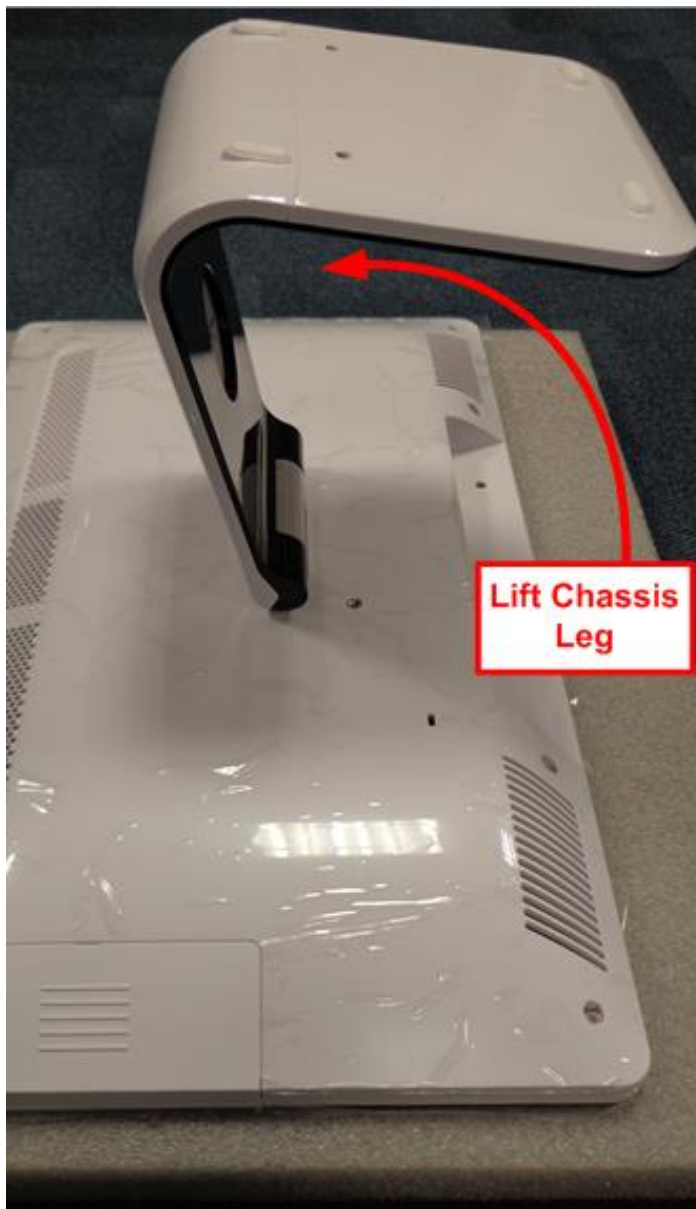


Figure 1 – Preparing to remove the Omnino 5 back panel

viglen

Great
Minds
Think

viglen

Step 2 - Locating and removing the back panel Screws

A total of nine chassis screws will then need to be removed from the back panel. There are:

- **Seven Larger Screws** located around the edges of the back panel (**Yellow**)
- **Two Small Screws** located underneath the stand just below the I/O area (**Red**)

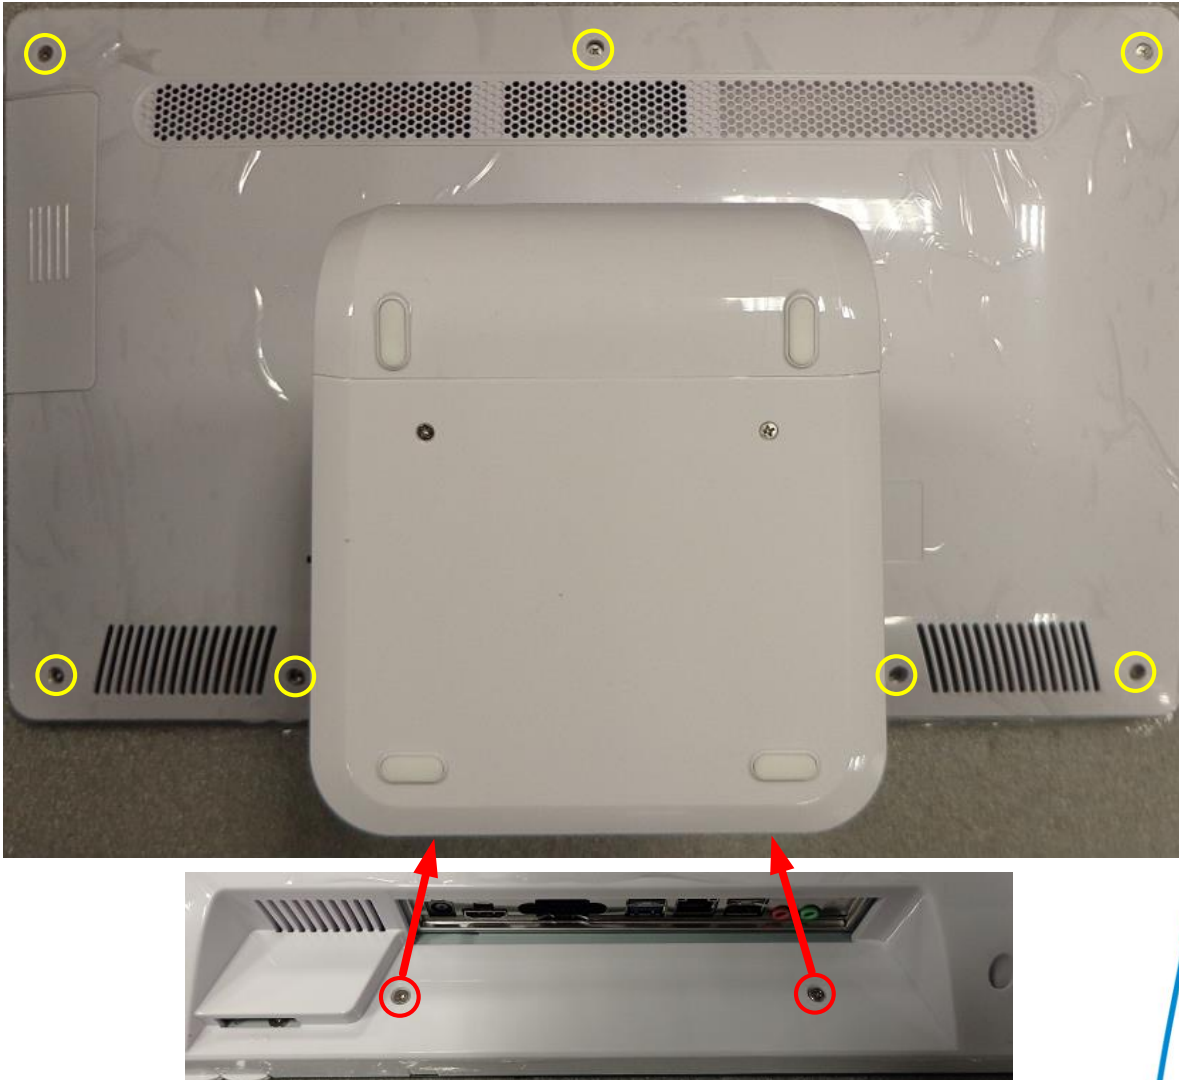


Figure 2 – Locating and removing the back panel screws

Once all nine screws have been removed you should be able to open the chassis by pulling upward on the chassis stand. Please note that it may be necessary to apply some sudden sharp upward force to remove the back cover.

viglen

Great
Minds
Think

viglen

Step 3 - Removing the integrated stand screws from VESA bracket

On the inside of the back panel you will see a VESA mounting bracket with many screws attached. To release the integrated stand **only the five central screws need removing.**

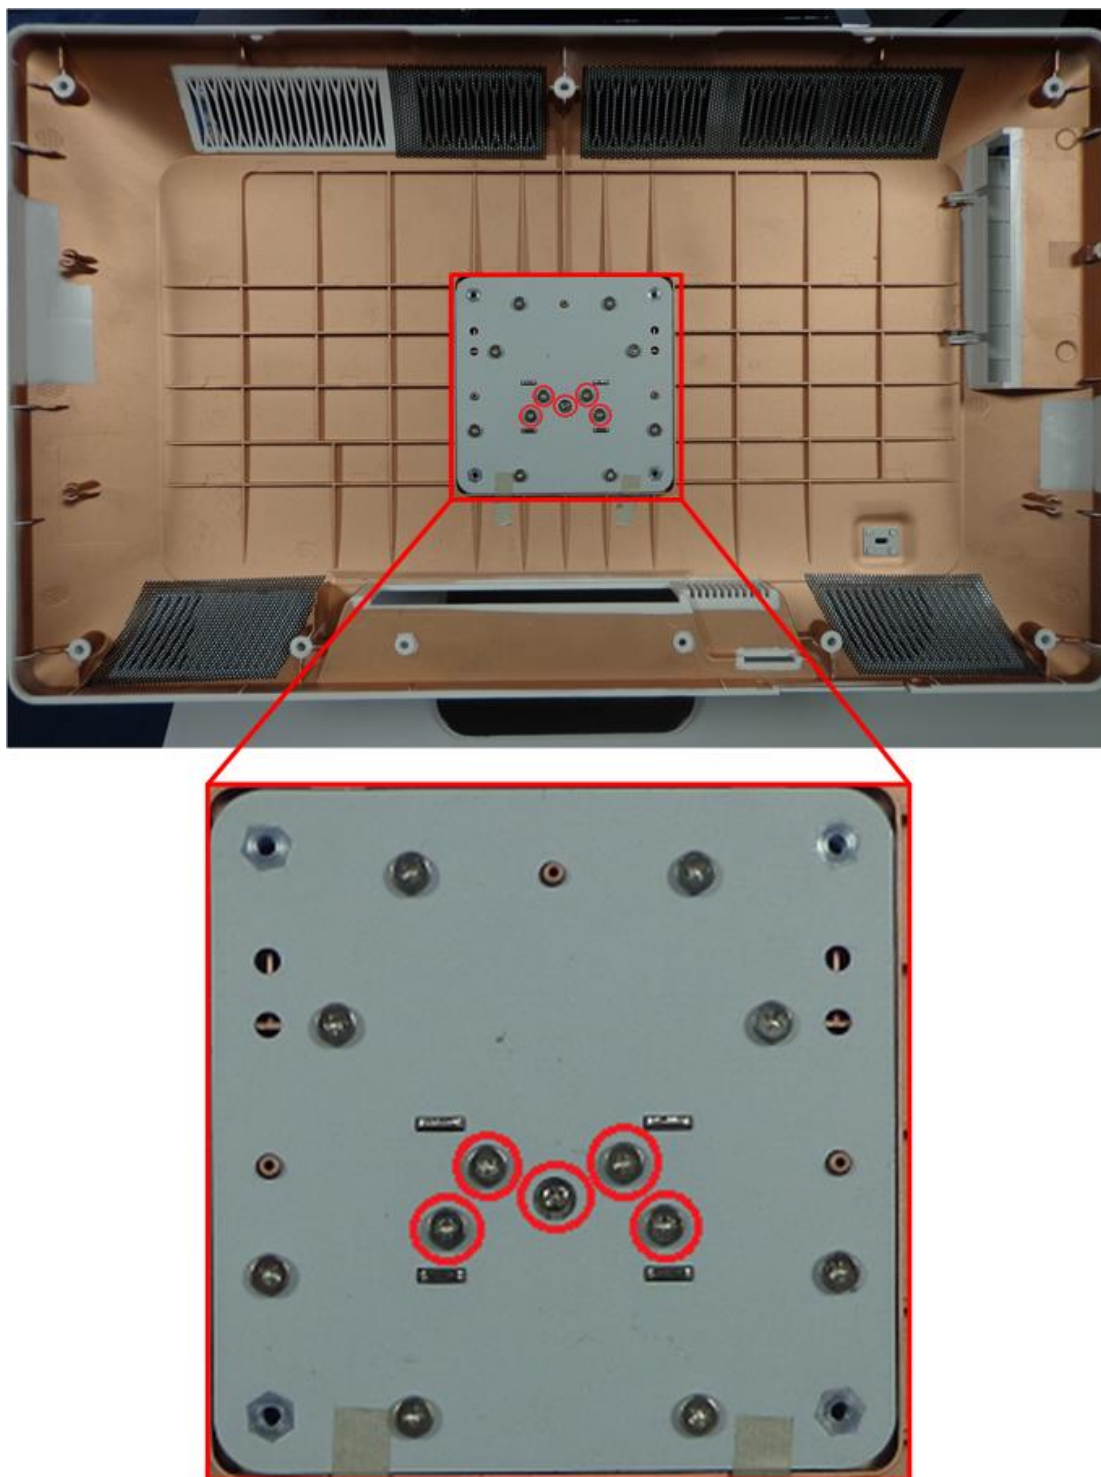


Figure 3 – Integrated chassis stand screws

viglen

Great
Minds
Think

viglen

Step 4 - Detaching the integrated chassis stand

Once the five screws have been removed from the VESA mounting bracket the integrated chassis stand can be detached. To do this, lie the Omnino 5 back panel down in the same way you did during step 1 and grip the top of the stand as demonstrated below:



Figure 4 – Detaching the integrated chassis stand

Whilst gripping here firmly you will be able to lift the integrated stand out and remove it from the Omnino 5 back panel.

viglen

Great
Minds
Think

viglen

Step 5 - Attaching a third party VESA stand (optional)

Once the integrated chassis stand has been removed an optional third party 100mm x 100mm VESA stand can be attached.

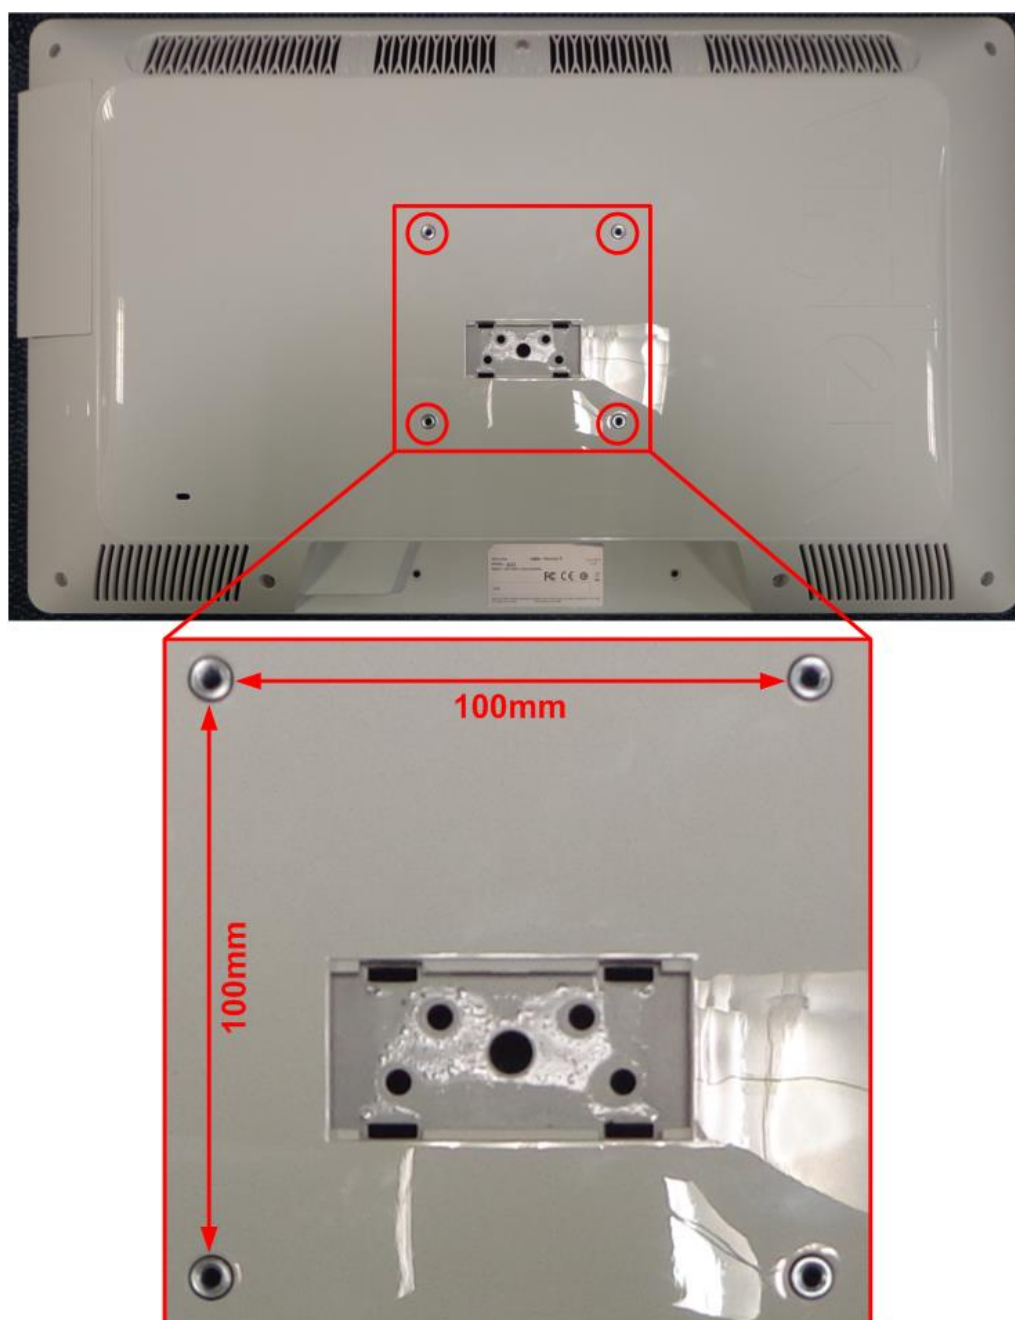


Figure 5 – Attaching a third party VESA stand

Omnino 5 chassis weight range (without stand): 6.4kg – 7.2kg

Please take care when choosing a new stand for your Omnino 5 to ensure that the stand is capable of supporting the weight of the chassis. You should note that the Omnino 5 is significantly heavier than a TFT or LCD monitor, therefore not all monitor stands will be suitable.

Please retain the Omnino 5 stand for future use.

viglen

Great
Minds
Think

viglen